


BONUM



Light the new
LIVING

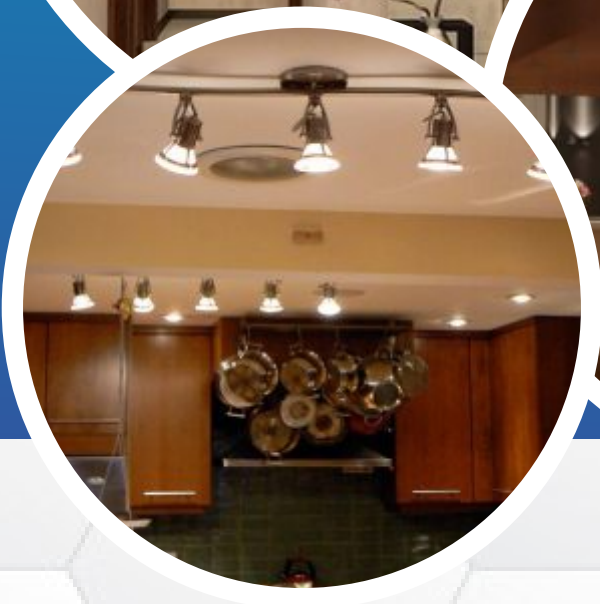

LED
Light Series

THE NAME ITSELF DEFINES TECHNOLOGIES IN LIGHTING



WE ARE

Bonum LED lights-the name itself defines technologies in lighting.

Bonum offers the most advanced technologies in its LED lighting range with a perfect combination of pricing, quality and services to impart its value.

Our lighting ranges are widely applicable in Residential, Commercial, Industrial and Architectural applications. We have taken benefits from current technology, whilst persistently planning for improvements to provide a maximum light output from the LEDs.

In th changing pace from traditional CFL to energy efficient LEDs, Bonums is committed to bring new innovations in the future of LED lighting, which not only change the lifestyle but will change light style of its consumers.

Bonum is dedicated towards manufacturing of innovative, next generation LED lighting solutions that improve quality of light, efficiency and enhance the environment through reduced energy consumption.

We are unique and will remain to be focused on values and sustainability.

MISSION POSSIBLE

Our mission is to serve the increasing demand for energy efficient, sustainable and smart control lighting solutions, whilst delivering the superior value to our customers on a consistent basis. The commitment infuses us to drive continuous development and improvement in our products and process to carry out rising demand for quality, energy efficient, eco-friendly lighting solutions.

LED
Light Series



LED Bulbs

Product Features

- ◆ Energy Saving upto 80% (Compared to GLS Bulb)
- ◆ Instant Start
- ◆ Aluminum / PC material for better heat dissipation
- ◆ High Quality plastic diffuser with high transmittance upto 90%
- ◆ No harmful UV / IR and Mercury free
- ◆ Surge protection upto 2.5KV
- ◆ LED Bulb Available with B22 & E27 Model

Applications :

Residential, Offices, Hospitals, Malls, Hotels etc.

Rechargeable LED Bulbs Available (Backup 4-5 Hours)

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
BB2209CRW180	9 W	2700 - 6500K	< 900 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2212CRW180	12 W	2700 - 6500K	< 1200 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
BB22005CW180	0.5 W	2700 - 6500K	< 50 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2203CW180	3 W	2700 - 6500K	< 300 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2207CW180	7 W	2700 - 6500K	< 700 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2209CW180	9 W	2700 - 6500K	< 900 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2212CW180	12 W	2700 - 6500K	< 1200 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2215CW180	15 W	2700 - 6500K	< 1500 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2218CW180	18 W	2700 - 6500K	< 1800 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2226CW180	26 W	2700 - 6500K	< 2600 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2236CW180	36 W	2700 - 6500K	< 3600 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9
BB2246CW180	46 W	2700 - 6500K	< 4600 lm	< 80	< 180°	90 - 300 V AC	< 50,000hrs	> 0.9



LED Tube Lights

Flameproof cum weatherproof Double Led tube light fitting. The technical details are as under.

- Protection IP : IP-65
- Input Power Supply : 100-300 VAC
- Mounting Type : Wall Mounting
- Material : Cast Aluminium Alloy LM-6
- Rating : Double x 36w x 4'Led (Replace to Double x 40watt x w'tube light)
- Enclosure : Flameproof (Ex-d) as per IS/IEC60079-1:2007 suitable for Installation in hazardous location zone - 1 & 2.
- Dimension : 1485 x 355MM & (1485X178MN)
- Glass : heat and impact resistance clear toughend zone - 1 & 2
- Gasket : Neoprene gasket
- Entry : 2Nos. of 3/4 ET cable entry.
- Wireguard : M.S. Galvanized white epoxy painted.
- Hardware : High tensile zinc passivated.
- Area Classification : Gas group IIA, IIB & IIC as per IS/IEC 60079-1:2007
- Finish : Anti corrosive epoxy power coated (631 shade of Is5)
- Standard : IS/IEC 60079-1:2007
- Certificate : Approved and certified by CIMFR Dhanbad



Flameproof Emergency LED Light	
Battery Type	: Lithium Ion, Lead-Acid
Input Voltage	: 230V AC & 24V DC
Charging Time	: 2-3hours
Backup	: 2hours
IP Rating	: Ip66
Operating Temp	: T6
Body Type	: Ceramic

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
T5BFL10CW2	10 W(2ft.)	2700 - 6500K	< 1000	< 80	110°	90-300 V AC	< 50,000hrs	> 0.9
T5BFL20CW4	20 W(4ft.)	2700 - 6500K	< 2000	< 80	110°	90-300 V AC	< 50,000hrs	> 0.9

Product Features

- ◆ Replacement for conventional CFL Tube Light
- ◆ No flickering, Instantly Starts. No humming noise
- ◆ Extruded Aluminium / PC material for better heat dissipation
- ◆ Sharp design with easy installation
- ◆ High Quality diffuser with transmittance upto 90%
- ◆ No harmful UV / IR and Mercury free



Applications : Residential, Offices, Hospitals, Parking Lots, Fuel Stations, Factories, Malls, Hotels etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
T5B05CW1	5 W	2700 - 6500K	< 500	< 80	110°	90-300 V AC	< 50,000hrs	> 0.9
T5B10CW2	10 W	2700 - 6500K	< 1000	< 80	110°	90-300 V AC	< 50,000hrs	> 0.9
T5B20CW4	20 W	2700 - 6500K	< 2000	< 80	110°	90-300 V AC	< 50,000hrs	> 0.9



LED Panel Lights

Slim & Surface



Product Features

- ◆ Optimised placement of high quality LEDs for uniform light distribution
- ◆ Superior quality of LED Driver
- ◆ High quality aluminium die-casting material for better heat dissipation
- ◆ High quality diffuser with transmittance upto 90%
- ◆ Aesthetic design and longer life
- ◆ No harmful UV /IR and Mercury free
- ◆ Color Available Upon Request: CW/NW/WW

Applications :

Residential, Offices, Hospitals, Parking Lots, Fuel Stations, Factories, Malls, Shopping Complex, Hotels etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
PALB06CWR/S	6 W	2700 - 6500K	< 600 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALB12CWR/S	12 W	2700 - 6500K	< 1200 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALB18CWR/S	18 W	2700 - 6500K	< 1800 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALB24CWR/S	24 W	2700 - 6500K	< 2400 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALB40CWR/S	40 W	2700 - 6500K	< 4000 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9

Wall Mounted Type

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
PALWB06CWR/S	6 W	2700 - 6500K	< 600 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALWB12CWR/S	12 W	2700 - 6500K	< 1200 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALWB18CWR/S	18 W	2700 - 6500K	< 1800 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALWB24CWR/S	24 W	2700 - 6500K	< 2400 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9
PALWB40CWR/S	40 W	2700 - 6500K	< 4000 lm	< 80	120°	90 - 300 V AC	< 50,000hrs	>0.9



LED Street Lights

Product Features

- ◆ Replacement for conventional HID Street Light
- ◆ High Power LEDs for better lighting
- ◆ Aesthetically designed pressure die-cast aluminium body
- ◆ Designed for better light distribution
- ◆ Optimum surge protection
- ◆ High Quality toughened glass
- ◆ Life Span
- ◆ Water Proof : (IP65/IP66/IP67) Available
- ◆ Color Available CW/WW/NW

Applications : Area Lighting, City Roads, Highways, Secondary Roads, Factories, Institutions and other Outdoor applications

Model No.	Power Consumption	CCT	Luminous Flux	CRI	IP Rating	Voltage Range	Surge Protection	P F
STLB24	20 W	5700 - 6500 K	> 2000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB30	30 W	5700 - 6500 K	> 3000 1m	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB36	36 W	5700 - 6500 K	> 3600 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB48	48 W	5700 - 6500 K	> 4800 1m	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB60	70 W	5700 - 6500 K	> 6000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB90	90 W	5700 - 6500 K	> 9000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB100	100 W	5700 - 6500 K	> 10000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB120	120 W	5700 - 6500 K	> 12000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB150	150 W	5700 - 6500 K	> 15000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9
STLB200	200 W	5700 - 6500 K	> 20000 lm	< 80	IP 65/66	90 - 300 V AC	2 - 10 KV	> 0.9



Slim Flood Lights



LED Flood Lights



Stadium Flood Lights



Lense Type Flood Lights



Back Choke Type Flood Lights

Product Features

- ◆ Replacement for Halogen Flood Light
- ◆ High Power LEDs for better lighting
- ◆ High power saving compared to conventional halogen lights
- ◆ Optimum surge protection
- ◆ Heavy aluminium body for better heat dissipation
- ◆ Water proof (IP-65/IP-66/IP-67)
- ◆ Back Choke/ Slim Type/Lense Type Flood Lights Available
- ◆ Color Available CW/WW/NW
- ◆ Stadium Type Flood Light Available upto 1000W (IP66/67)

Applications : Parking lots, Building & Ground, Facade, Industrial yard, Billboards, Recreational Area and Other Outdoor applications.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	IP Rating	Voltage Range	Surge Protection	P F
FLBB30W	30 W	5700 - 6500 K	> 3000 1m	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB50W	50 W	5700 - 6500 K	> 5000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB60W	60 W	5700 - 6500 K	> 6000 1m	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB100W	100 W	5700 - 6500 K	>10000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB150W	150 W	5700 - 6500 K	> 15000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB200W	200 W	5700 - 6500 K	> 20000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB250W	250 W	5700 - 6500 K	> 25000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB300W	300 W	5700 - 6500 K	> 30000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9
FLBB400W	400 W	5700 - 6500 K	> 40000 lm	< 80	IP 65/66/67	90 - 300 V AC	2 - 10 KV	> 0.9



LED Track Lights COB Series

Product Features

- ◆ Replacement for old conventional Track lights for elegant interior ambience.
- ◆ No flickering. Instantly starts. No humming noise.
- ◆ Heavy Aluminium for better heat dissipation.
- ◆ Sharp design with easy installation.
- ◆ High quality chip for longer life & optimum color rendering.
- ◆ No harmful UV / IR and Mercury free.
- ◆ Color Available CW/WW/NW

Applications :

Residential, Offices, Showrooms, Interior Decorative Ceilings, Malls, Hotels etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Voltage Range	Life Span	PF
TRKLB03	3 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB06	6 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB09	9 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB16	16 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB24	24 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB30	30 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
TRKLB50	50 W	5700 - 6500K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9



LED High Bay Lights



Product Features

- ◆ Replacement for traditional HID High Bay lights
- ◆ Perfect for Industrial facilities ware houses for appealing looks
- ◆ Quality Aluminium for better heat dissipation
- ◆ Low on maintenance cost
- ◆ High quality optics for uniform lighting
- ◆ No harmful UV / IR and Mercury free
- ◆ Color Available Upon Request: CW/NW/WW

Applications :

Residential, Ware Houses, Railway, Concourse halls, Departmental Stores etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Voltage Range	Life Span	PF
HBLB 30	30 W	2700 - 6500K	< 3000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 50	50 W	2700 - 6500K	< 5000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 100	100 W	2700 - 6500K	< 10000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 150	150 W	2700 - 6500K	< 15000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 200	200 W	2700 - 6500K	< 20000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 250	250 W	2700 - 6500K	< 25000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
HBLB 400	400 W	2700 - 6500K	< 40000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9



LED Well Glass Light


Flameproof cum weatherproof Well Glass light fitting.
The technical details are as under.

Protection IP	: IP-65
Input Power Supply	: 100-300 VAC
Mounting Type	: Wall Mounting
Material	: Cast Aluminium Alloy LM-6
Rating	: 30W, 40W, 60W, 90W, 100W
Enclosure	: Flameproof (Ex-d) as per IS/IEC60079-1:2007 suitable for Installation in hazardous location zone - 1 & 2.
Glass	: heat and impact resistance clear toughend zone - 1 & 2

Gasket	: Neoprene gasket
Entry	: 2Nos. of 3/4 ET cable entry.
Wireguard	: M.S. Galvanized white epoxy painted.
Hardware	: High tensile zinc passivated.
Area Classification	: Gas group IIA, IIB & IIC as per IS/IEC 60079-1:2007
Finish	: Anti corrosive epoxy power coated (631 shade of Is5)
Standard	: IS/IEC 60079-1:2007
Certificate	: Approved and certified by CIMFR Dhanbad

Bonum Bulkhead Light

Lighting Type	: Halogen, LED, Fluorescent
IP Rating	: Ip66
Base Type	: E27
Protection Zone	: Zone 1,2
Variation	: 160WMLL, 125WMV, 2X23WCFL, 2X26 WCFL
Dimensions	: 1255mm x 260mm
Protection Type	: Ex-d
Gas Group	: IIA, IIB

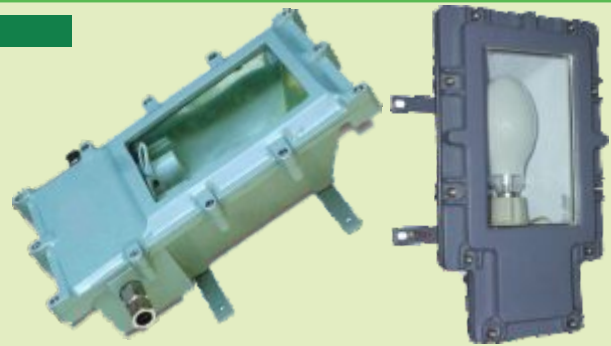

Applications :

Residential, Ware Houses, Railway, Concourse halls, Departmental Stores etc.

Model No.	Power in Watt	CCT	Luminous Flux	CRI	Voltage Range	Life Span	PF
FLWB 30	30 W	2700 - 6500K	< 3000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
FLWB 40	40 W	2700 - 6500K	< 4000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
FLWB 60	60 W	2700 - 6500K	< 6000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
FLWB 90	90 W	2700 - 6500K	< 9000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
FLWB 100	100 W	2700 - 6500K	< 10000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9





LED Strip Lights

LED Spot Down Lights

Product Features

- ◆ For Elegant Interior Design.
- ◆ Flexible Customisable.
- ◆ Long life & Energy Savings.
- ◆ No harmful UV / IR and Mercury free.

Applications : Residential, Offices, Showrooms, Interior Decorative Ceilings, Malls, Hotels etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Beam Angle	Voltage Range	Life Span	PF
STRPB25WW	25 W	3528	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9
STRPB25WW	25 W	3528	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9
STRPB25RGB	25 W	3528	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9
STRPB30CW	30 W	5050	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9
STRPB30WW	30 W	5050	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9
STRPB30RGB	30 W	5050	60	< 80	120°	85 - 265 V AC	< 30,000hrs	> 0.9

Product Features

- ◆ Replacement for conventional Down Light.
- ◆ No flickering. Instantly starts. No humming noise.
- ◆ Heavy Aluminium for better heat dissipation.
- ◆ Sharp design with easy installation.
- ◆ High quality chip for longer life & optimum color rendering.
- ◆ No harmful UV/ IR and Mercury free.

Applications : Residential, Offices, Showrooms, Interior Decorative Ceilings, Malls, Hotels etc.

Model No.	Power Consumption	CCT	Luminous Flux	CRI	Voltage Range	Life Span	PF
DLSBO1	1 W	5700 - 6500 K	< 100 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSBO3	3 W	5700 - 6500 K	< 300 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSBO6	6 W	5700 - 6500 K	< 600 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSBO9	9 W	5700 - 6500 K	< 900 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSB16	16 W	5700 - 6500 K	< 1600 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSB24	24 W	5700 - 6500 K	< 2400 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSB30	30 W	5700 - 6500 K	< 3000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9
DLSB50	50 W	5700 - 6500 K	< 5000 lm	< 80	85 - 265 V AC	< 30,000hrs	> 0.9



Flameproof Exhaust Fan

Flameproof Wall Mounting Fan

Mounting Type : Wall Mount
 Size : 12" to 30"
 Color : Epoxy Light Grey
 Power : 230VAC & 440VAC
 Electric Current Type : AC
 Number of Blades : 3
 Air Delivery : 900RPM & 1440RPM
 Area Classification : Zone 1,2
 Elect. Rating : 18"/24"/36"
 Gas Group : IIA, IIB
 IP Protection : IP 55
 No of Blade : 3
 Protection : IP-55 As Per IS/IES 60034-5:2000

Enclosure : Ex-D As Per Is/Iec 600079-1:2007, Suitable for Installation in Hazardous Location Div-1 & 2 As Per Is - 5572 (Part -1)
 Area Classification : Gas Group IIA, IIB As Per IS/IEC : 60079-1:2007
 Material : Cast Iron Grade FG 220 As Per ISO 185
 Finish : Epoxy Light Grey Shade 631 As Per IS:5
 Approval : CIMRF-Dhanbad
 Standard : IS/IEC 60079-1-2007
 Gas Group : IIA & IIB
 Zone : 1 & 2

SR. NO	SIZE INCH	SIZE MM	CFM	H.P	PHASE	VOLTS	HZ	WEIGHT IN KGS
01	12"	305	1250	0.25	1	230	50	10.500
02	12"	305	1250	0.25	3	415	50	10.500
03	16"	406	2500	0.33	1	230	50	12.00
04	16"	406	2500	0.33	3	415	50	12.00
05	18"	457	4000	0.50	1	230	50	17.00
06	18"	457	4000	0.50	3	415	50	17.00
07	24"	610	6100	0.50	1	230	50	21.500
08	24"	610	6100	0.50	3	415	50	21.500
09	30"	750	6100	0.50	1	230	50	28.500

SR. NO	SIZE INCH	SIZE MM	CFM	H.P	PHASE	VOLTS	HZ	WEIGHT IN KGS
07	24"	610	6100	0.50	1	230	50	22.800
08	24"	610	6100	0.50	3	415	50	22.800
09	30"	750	6100	0.50	1	230	50	25.500
09	30"	750	6100	0.50	1	230	50	25.500





Explosion Proof Multiway Junction Box

We Have Been Able To Bring Forward A Qualitative Range Of Flameproof Junction Box. This box is widely used to cover the electrical box and feed wires. Flameproof cum weatherproof Multipleway Junction box. The technical details are as under

Material : Cast Aluminium Alloy LM-6
 Dimensions : 600mm x 600mm x 200mm
 IP Rating : IP55
 Finish : Anti Corrosive Epoxy Powder Coated (631 Shade of Is5)
 Earthing : 2 Nos. of External and One No. of Internal
 Gas Group : IIA, IIB & IIC
 Protection Type : Ex-d
 Protection Zone : Zone 1,2



Color : Epoxy Powder Coating
 Size : 4" X 4" TO 700 X 500
 Material : Alluminium Alloys Lm-6, aluminium Die Cast, Aluminium Alloy
 Dimensions : 250X350mm
 IP Rating : IP55, IP65



Explosion Proof Multi Way Junction Box
Flameproof Proof Multiway Junction Box
BONUM WP Junction Box
EXPLORE MORE CATEGORIES





PVC TAPE

NEW
TECHNOLOGY

BONUM[®]

30
ROLLS

An ISO 9001:2015
ISO 14001:2015
Certified Company



SELF ADHESIVE PVC ELECTRICAL INSULATION TAPE

1.80 cm x 6.50 m x 0.125 mm

BONUM - the reliable self adhesive electrical insulation tape.

- ◆ More elastic
- ◆ Stick easily to any subject
- ◆ Weatherproof
- ◆ Non-aging
- ◆ Surge voltage withstands upto 40 KV
- ◆ Resistant to oil, chemical & acids
- ◆ Quality of insulation property doesnot destroy for longtime.

50VA SOLAR CFL UPS

- ◆ Light Weight & Easy Handling.
- ◆ Compact Size, Portable in Fully ABS Plastic Body.
- ◆ Table Top As Well as Wall Mountable.
- ◆ CFL UPS with SMPS Card.
- ◆ Faster Battery Charging From Input 90V-280V.
- ◆ In Built Surge Protection Ensures Safety of Appliances.
- ◆ Mosfet Based High Frequency Digital System.
- ◆ Over Load, Deep Discharge & Over Charge Protection.
- ◆ Quick Battery Charging in 7 Hrs.
- ◆ 3hrs Backup on 3 CFL Tube (11w X 3).
- ◆ Solar charging and 12V DC fan output available.

- ◆ 2 High glow SMD LED.
- ◆ Available in different colours.



6V/5Ah, 12V/7.5Ah Battery Available, Application UPS, CFL Invertor, Weight Machine & many more



Cable 0.5 to 16sq mm multi strand



General Notes

- ◆ The prices are inclusive of Govt. levies as applicable.
- ◆ MRP stands for Maximum Retail Price.
- ◆ Product can't be sold above MRP.
- ◆ Prices will be applicable as per prevailing rates at the time of supply.
- ◆ As per the prevailing trade policy from time to time the prices of product mentioned in this price list are subject to be discounted.
- ◆ All goods dispatched by us will be on purchasers risk & any complaint arising against loss, damage or shortage will be filed by the purchaser directly with carriers.
- ◆ All products will be supplied as per standard specification & can be added with special features on demand.
- ◆ Prices are subject to change without prior notice.
- ◆ Bonum reserves all the rights to issue amendments, which may arise due to any errors in the price list. Disputes if any arises are subject to Bhubaneswar jurisdiction only.
- ◆ Due to continuous improvements in design & technology at Bonum, the actual product when supplied may differ from the details provided herein. All the picture shown are indicative only.



Bonum Industries Pvt. Ltd.

An ISO 9001:2015, ISO 14001:2015 Certified Company

Plot No.: 30/3281, Near Ram Lila Padia, Meherpalli,

Jharapada, Bhubaneswar, Odisha, Pin : 751006

Contact : 81449 18280, 81449 18281, 70777 00154

E-mail : bonumgroups@gmail.com, sk.khatib@bonumgroups.com,

sarbeswar.mahapatra@bonumgroups.com, Website : www.bonumgroups.com